


<p>BODY 107' ASL Aluminum Body</p> <p>COMPT, LEFT SIDE FRONT Full Height RollUp Forward</p> <p>COMPT, LEFT SIDE REAR Full Height RollUp Rearward</p> <p>COMPT, RIGHT SIDE FRONT Full Height RollUp Forward</p> <p>COMPT, RIGHT SIDE REAR Full Height RollUp Rearward</p>	<p>WATER TANK 500 Gallon Poly Water Tank</p> <p>Foam System Plumbing for Future Husky Foam System</p> <p>Foam Cell 20 Gallon Foam Cell, Non Reduced Water</p>
---	--

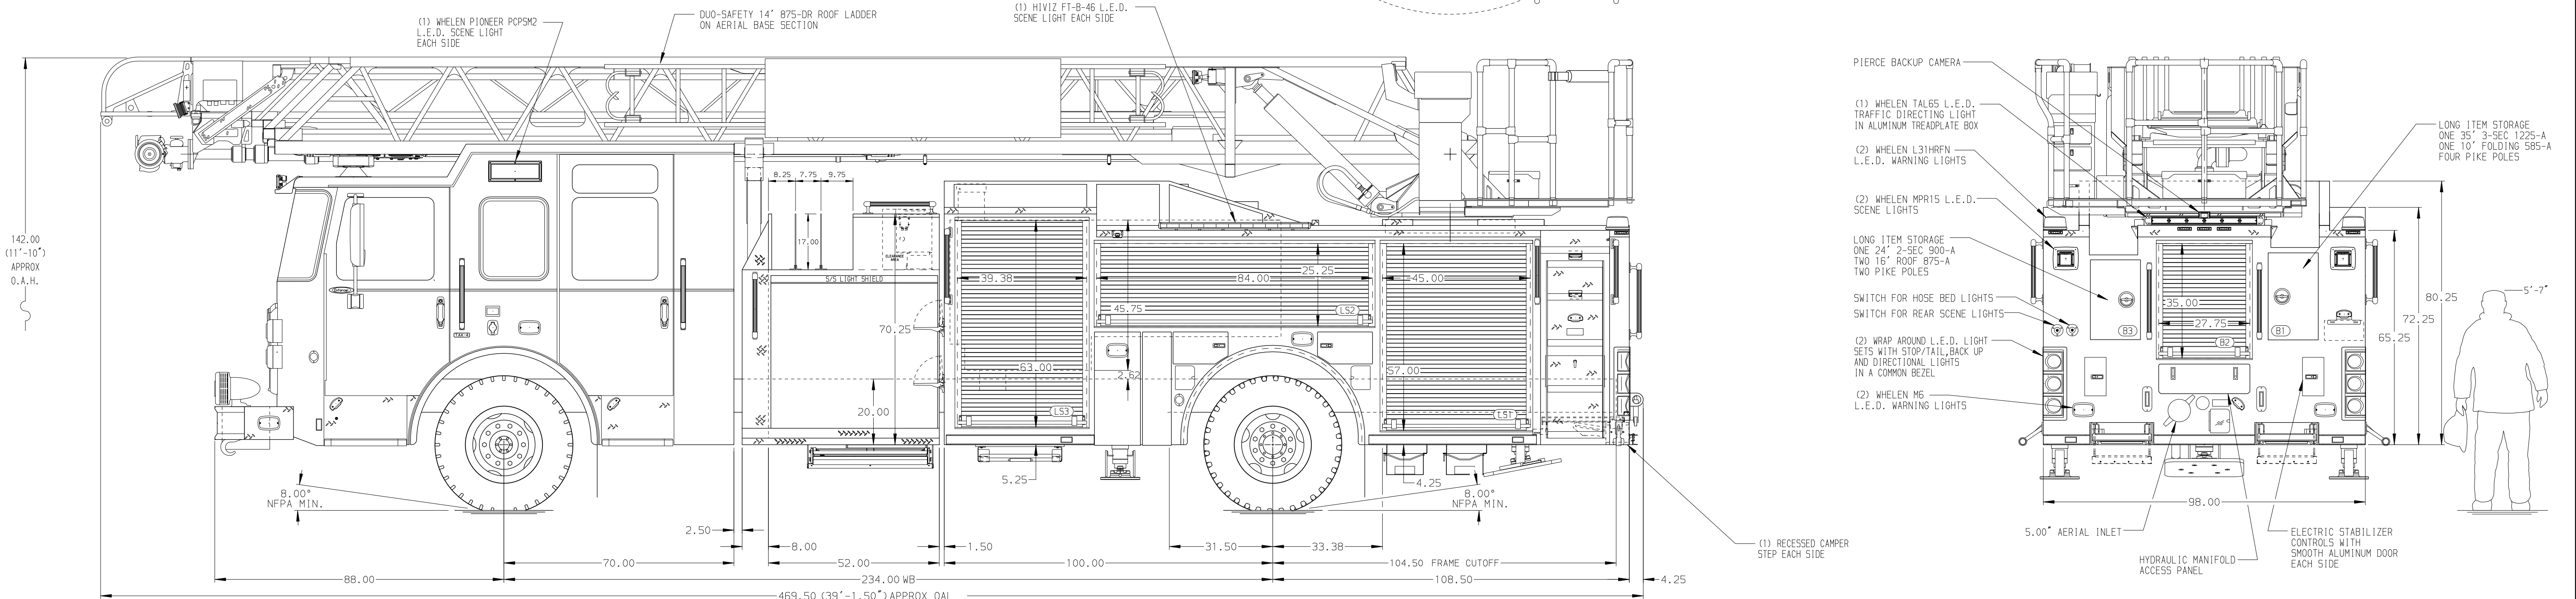

<p>CHASSIS Enforcer Chassis 450 HP Cummins L9 Engine</p>	<p>CAB 7010 Enforcer Notched Cab 19\" Extended Stainless Steel</p>	<p>AXLE, FRONT, CUSTOM 22,800 Lb TAK-4 Axle</p> <p>AXLE, REAR 33,500 Lb Meritor Axle</p>	<p>TRANSMISSION Allison 5th Gen, 3000 EVS P</p>	<p>PUMPHOUSE 52\" Control Zone Side Mount 2000 GPM Waterous CSU</p>	<p>CROSSLAYS, 1.50\" (2) 1.50\" Standard Capacity</p> <p>CROSSLAYS, 2.50\" (1) 2.50\" Standard Capacity</p>	<p>SPEEDLAYS Speedlays Not Required GENERATOR Generator Not Required</p>	<p>SAFETY Side Roll and Frontal Impact Protection</p>	<p>CUSTOMER APPROVAL APPROVED BY: _____ DATE: _____</p>	<p>Pierce MANUFACTURING INC.</p>	<p>JOB NO. 35316 SCALE 1:24 DATE DRAWN BY TKA 05MAY20 CHECKED BY THS 6MAY20 SHEET SIZE D SHEET NO. 1 OF 1</p>
<p>NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.</p>										
<p>1. ONE 1.50\" OUTLET WITH 2.00\" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY 2. SHOVEL RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB 3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL 4. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT 5. BATTERY CHARGE INDICATOR LOCATED ON DRIVERS SIDE CAB 6. SIX ADJUSTABLE SHELVES LOCATED IN COMPARTMENTS PER SHOP ORDER 7. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED IN COMPARTMENTS PER SHOP ORDER 8. NON-RAISED AERIAL PEDESTAL 9. 1500 GPM HIGH FLOW WATERWAY 10. LIMITED RETRACTION NOT REQUIRED</p>										