
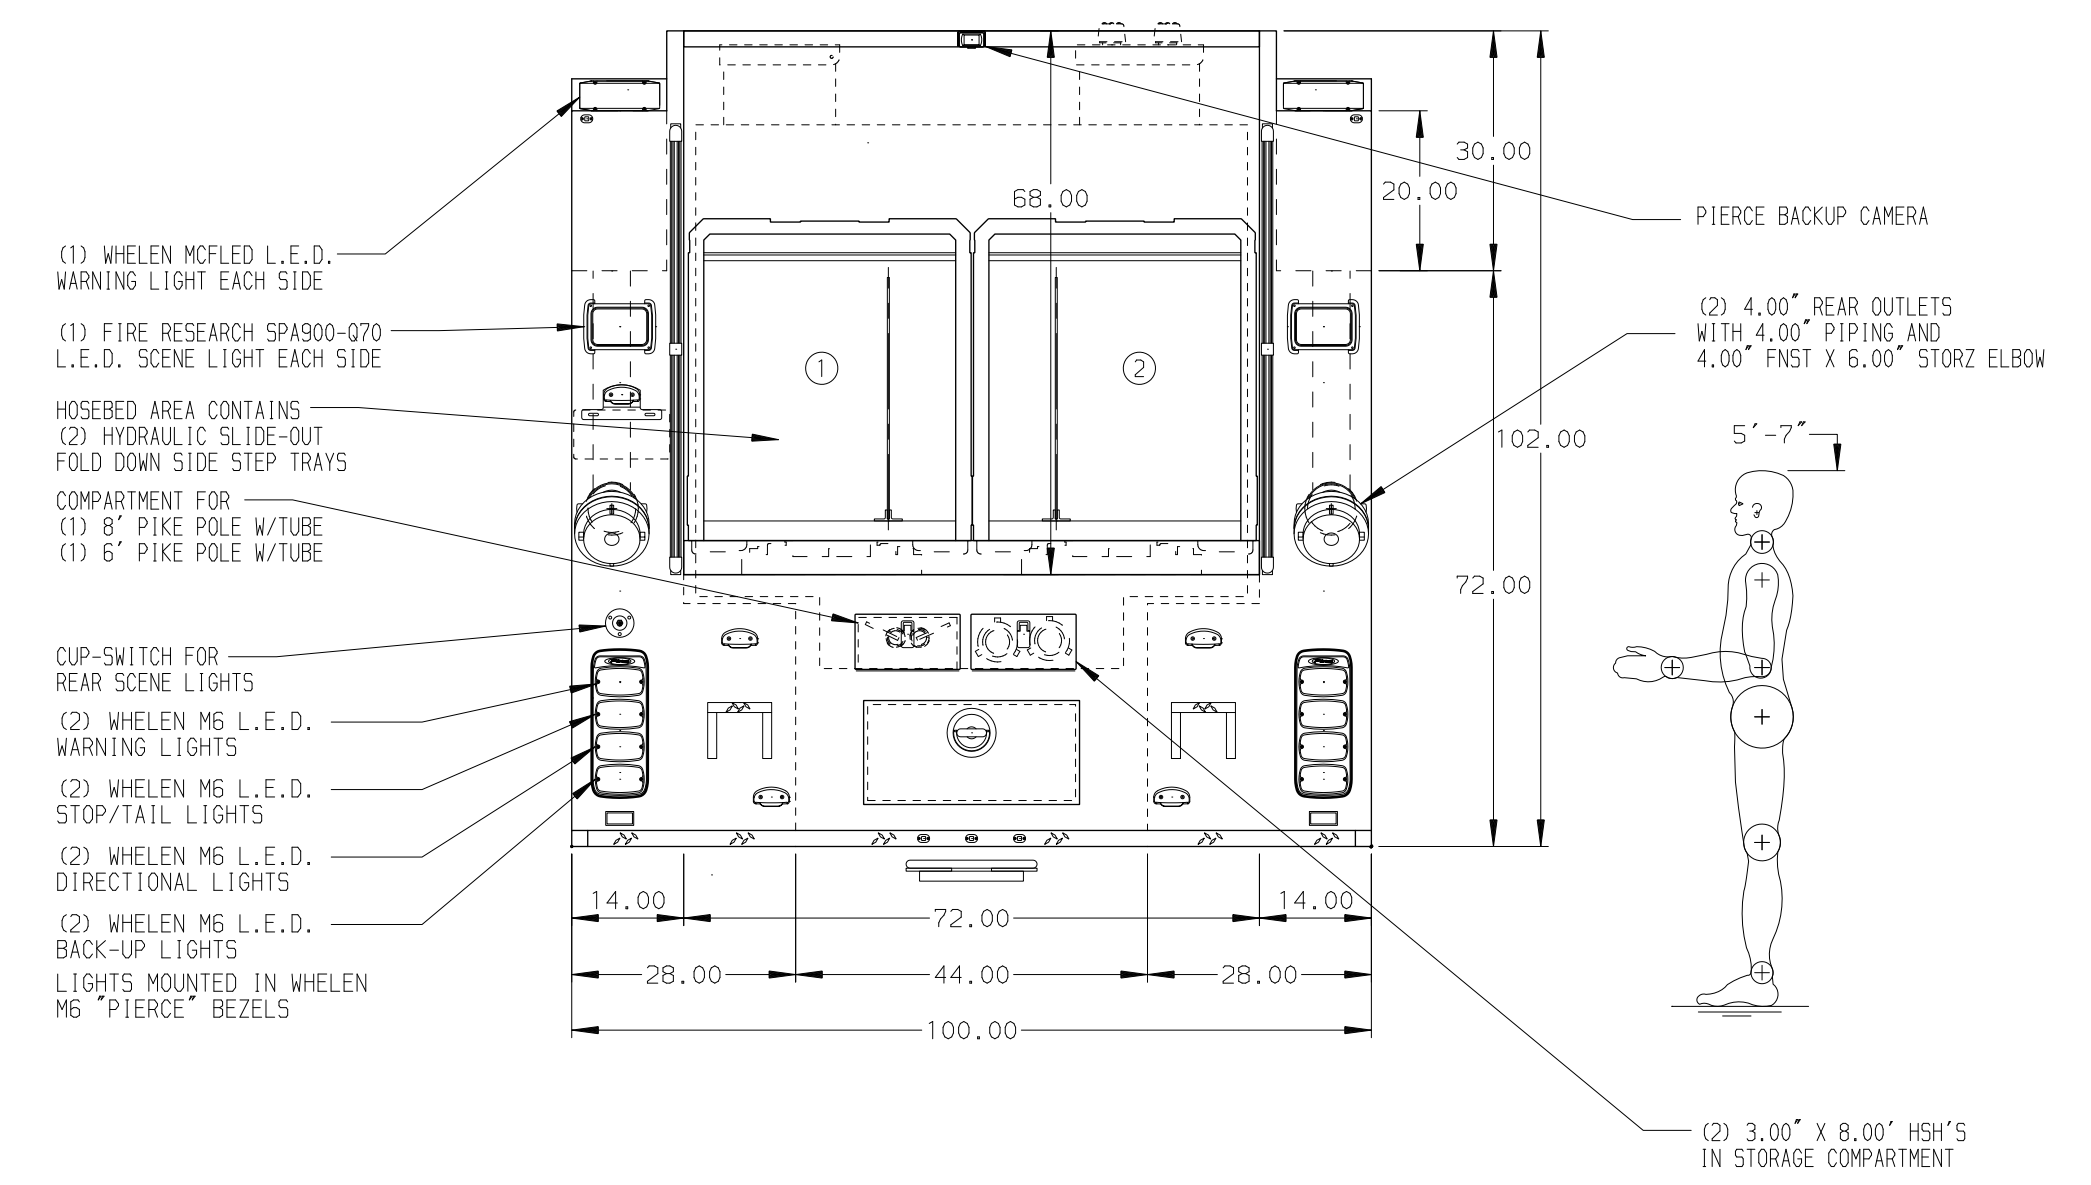


HOSEBED CAPACITIES

① TRAY WILL HOLD 300' OF 3.00" HOSE & 500' OF 7.25" HOSE

② TRAY WILL HOLD 300' OF 3.00" HOSE & 500' OF 7.25" HOSE

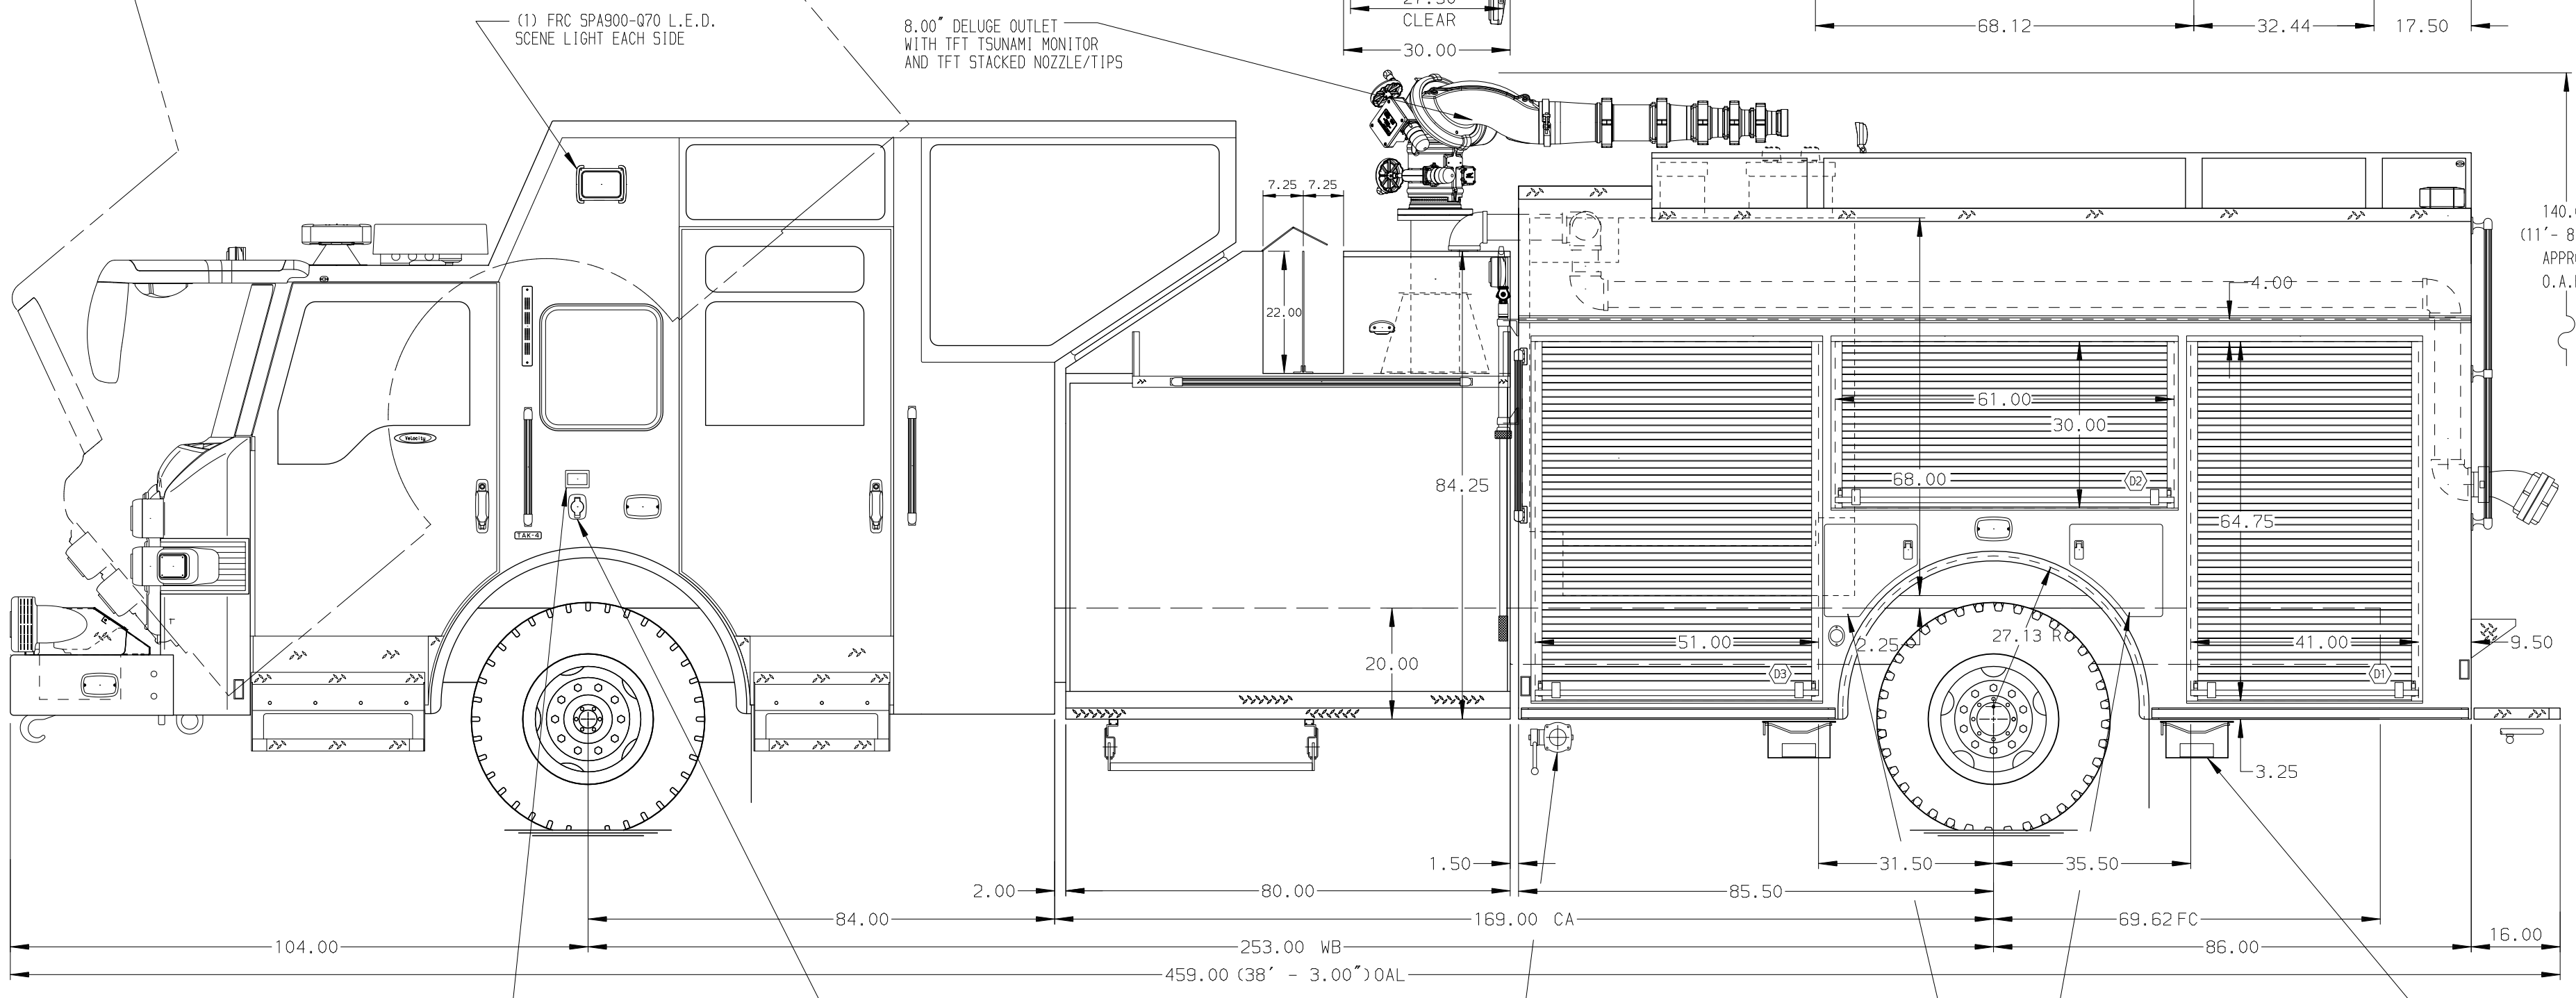

ALUMINUM BODY

MAXIMUM O.A.L. 460.00"

MAXIMUM O.A.H. 150"

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED ON DS PUMP PANEL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED D1, D2, D3, P1, P2 & P3
- ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF IN COMPARTMENT D1, D3, P2 & P3
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT D1, D3, P1 & P3
- SAFE FLEET DRIVER'S SIDE & PASSENGER'S SIDE CAMERA MOUNTED ON UPPER FORWARD CORNER OF PUMP PANEL

REV	DATE	BY	CH	VELOCITY
1	14MAY18	AMI	CHR	MAKE
2	11APR18	AMI	CHR	PIERCE
3	21FEB18	AMI	CCA	MODEL

		JOB NO.	32251
		SCALE	1:24
3000-D-950 300 GAL WATER, 650 FOAM, 171" PUMPER BODY 8.00" DELUGE, TWO-SECTION HYD SLIDE-OUT HOSE TRAY		DRAWN BY	AMI
		CHECKED BY	CCA
LYONDELLBASELL - BAYPORT BYO COMPLEX PASSADENA, TEXAS		SHEET SIZE	SHEET NO.
		DWG NO.	32251AD
			1 OF 1