
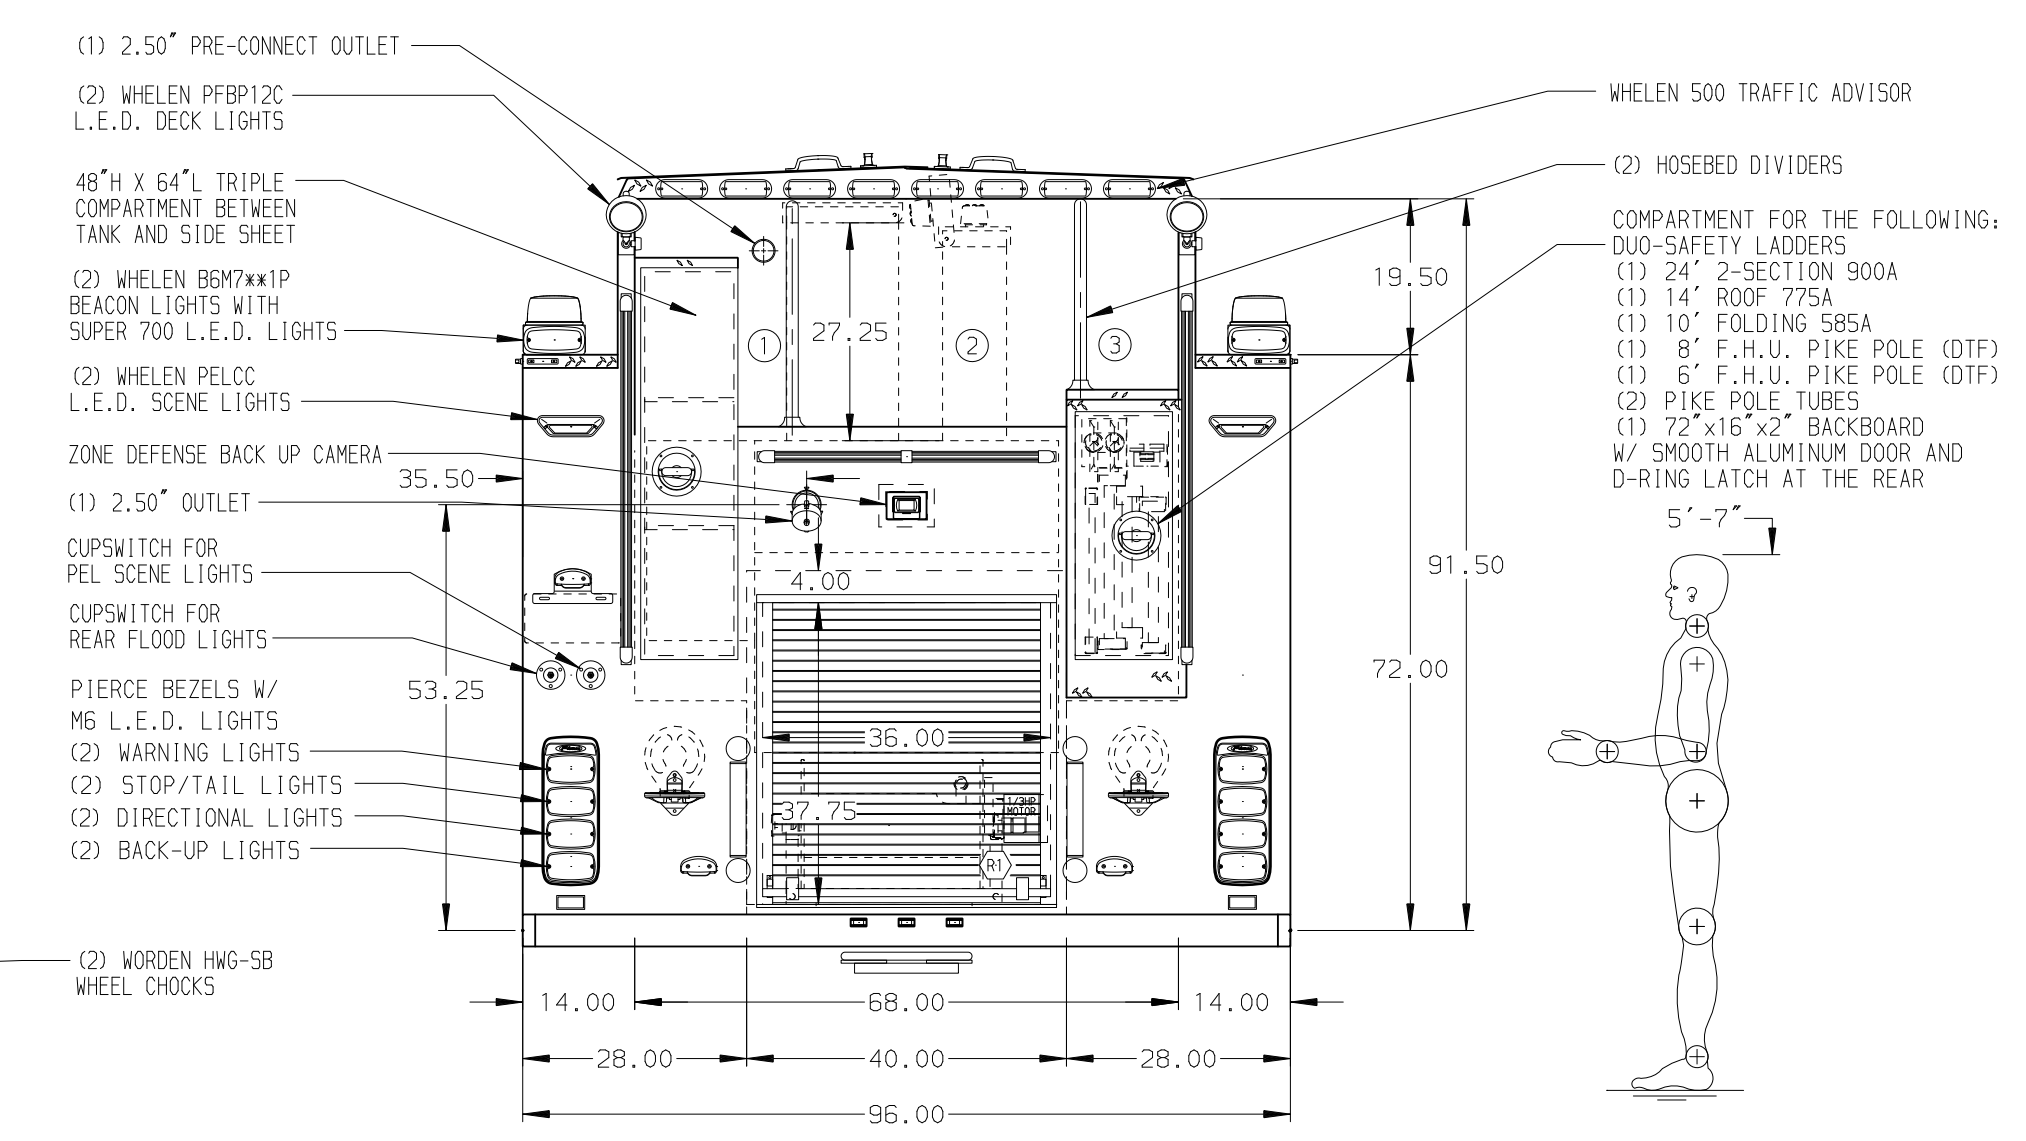


- HOSEBED CAPACITIES
- ① - 200' OF 2.50" D.J. HOSE
 - ② - 1200' OF 5.00" D.J. HOSE
 - ③ - 300' OF 3.00" D.J. HOSE

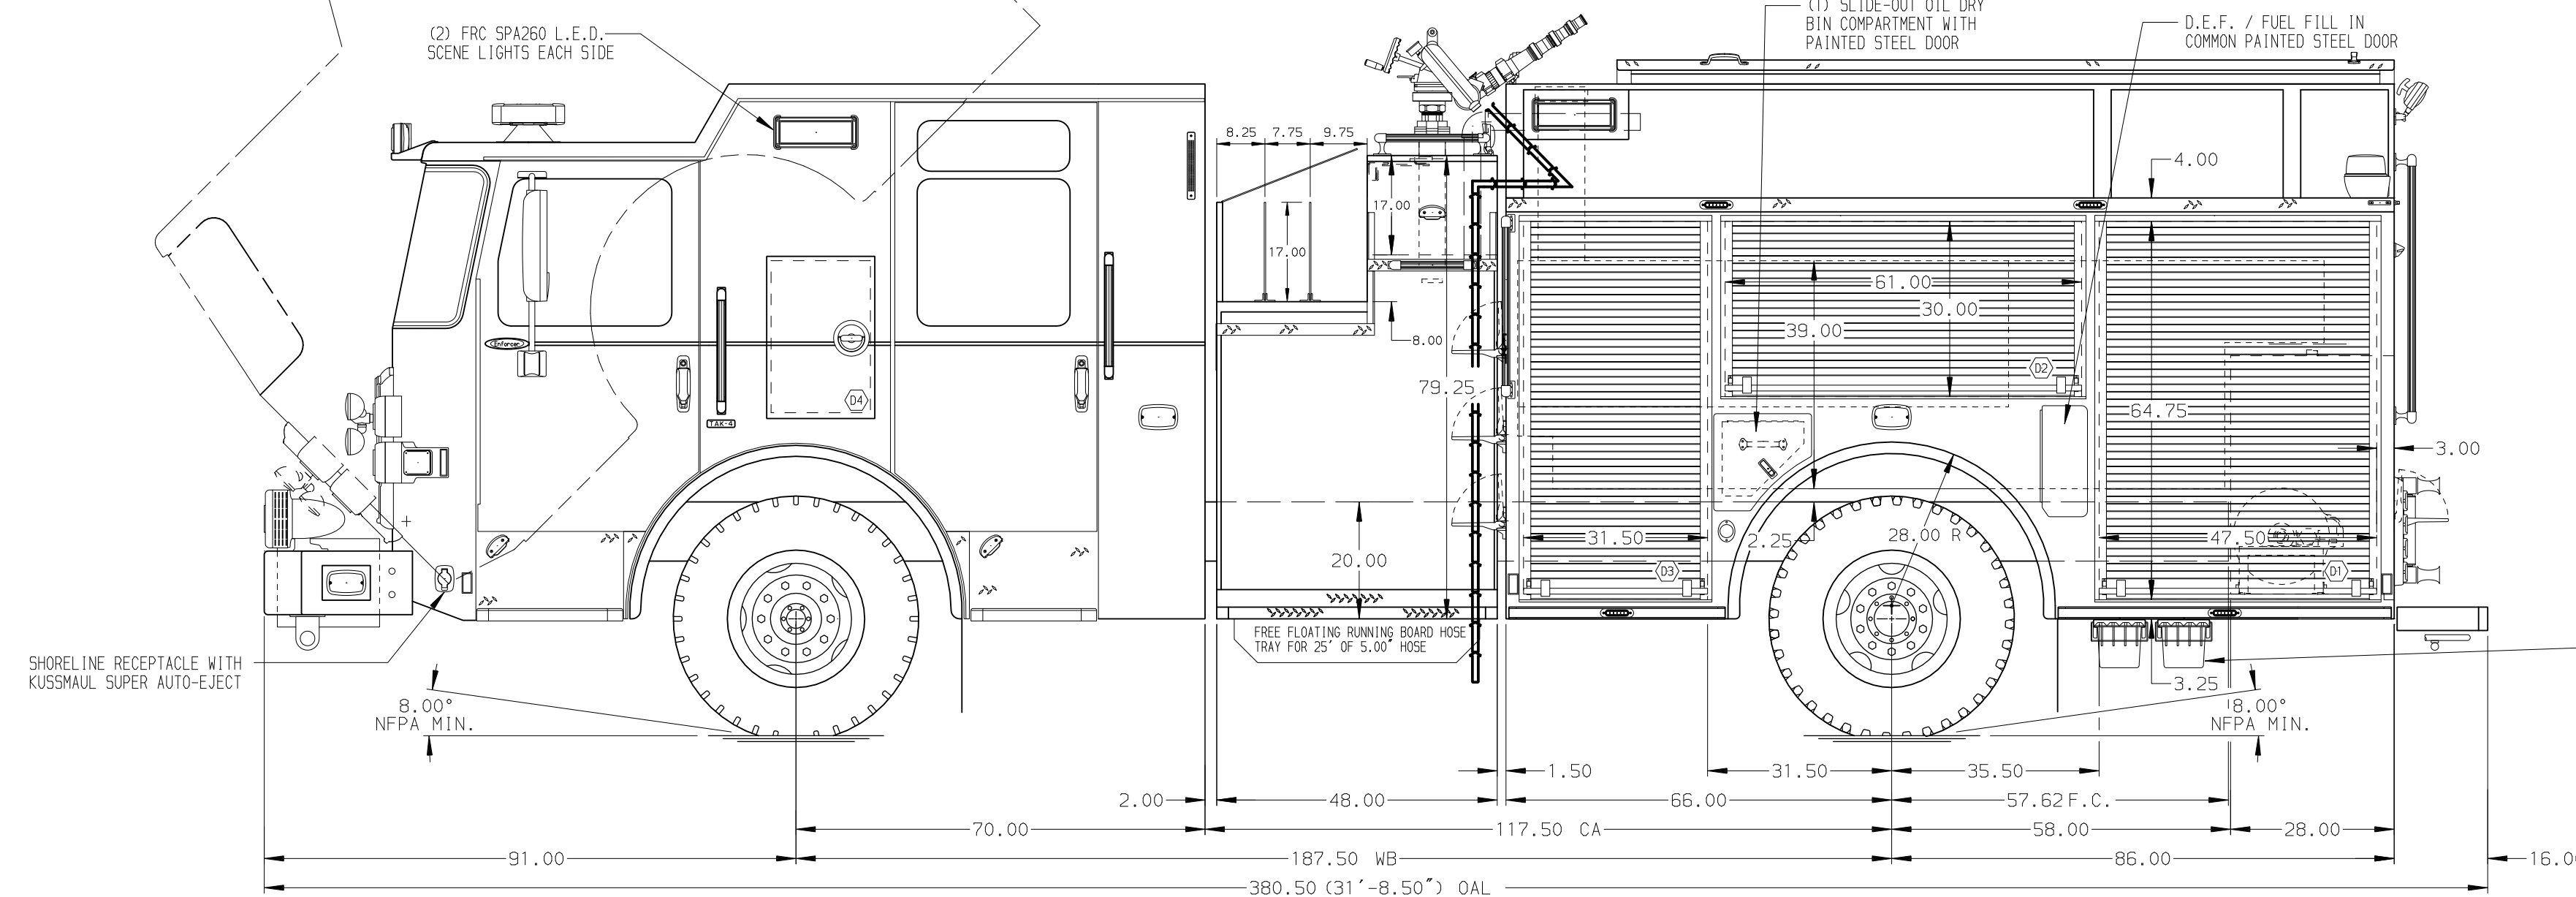

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER LOCATED ON CAB
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
- CITICH DRAWER ASSEMBLY IN COMPARTMENT D3
- ZIOMATIC SOB4 HOLDER BRACKET LOCATED DS EXTERIOR ACCESS EMS COMPARTMENT
- ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENTS D3, P1, P2, AND P3. TWO IN D1.
- ONE FLOOR MOUNTED SLIDE OUT TRAY IN D1, P1, AND P3.
- ONE SWINGOUT ALUMINUM TOOLBOARD IN P2 AND D2.
- ONE HANNAY EF4130-17-18 BOOSTER REEL IN R1.
- 3/16" ALUMINUM PEGBOARD IN D1, D3, P1, AND P3

REV	DATE	BY	CH	ENFORCER
23JAN17	GVH	CHR		
01NOV16	GVH	SMA		

		JOB NO.	30707
		SCALE	DATE
TITLE	1500-D-750 GAL WATER, 30 GAL FOAM, 161" FDLER BODY (2) CROSSLAYS, DELUGE, HUSKY 3 FOAM SYSTEM		
FOR	RED OAK FIRE DEPARTMENT RED OAK, TEXAS		
DWG NO.	30707AD		
DRAWN BY	GVH	CHECKED BY	SMA
SHEET SIZE	D	SHEET NO.	1 OF 1