

GREATER THREATS DEMAND
GREATER RESPONSE.



Striker

4x4

When the world around you is at its worst, you need to perform at your best. The new Striker lets you lead like never before. Greater fire suppression, control, safety and versatility maximize your response like no other truck can. Giving you the ultimate weapon against the ever-changing risks, threats and dangers of ARFF.

FOLLOW NO ONE.



NEW STRIKER STANDARDS

Get innovative fire suppression, unmatched chassis performance, advanced safety systems, unsurpassed reliability and durability, and smart design.

Get to know the new Striker.

Innovative Fire Suppression

- Optional increased pump capacity
- Optional crosslays to access handlines from either side of the truck

Unmatched Chassis Performance

- More than 2,000 lbs. (907 kg) lighter than the current Striker for faster acceleration
- 0-50 mph (80 kph) in under 25 seconds
- Comes equipped with Oshkosh® patented TAK-4® all-wheel independent suspension
- Center steer for greater all-around visibility

Advanced Safety Systems

- Improved turning radius and maneuverability
- 11% greater braking power over the current Striker (with disc brake option)
- 84 sq. ft. glass for maximum driver visibility


Unsurpassed Reliability and Durability

- Walk-in service port with incorporated drip pan
- Industry-leading access to engine and power pack
- 29% greater fuel capacity
- 24/7/365 support

Smart Design

- Color-coded switches easily identify controls (water, foam, dry chemical, clean agent)
- Cab space – 275 cubic ft. (7.8 cubic m)

THE NEW STRIKER CHANGES THE WAY YOU FIGHT BACK.

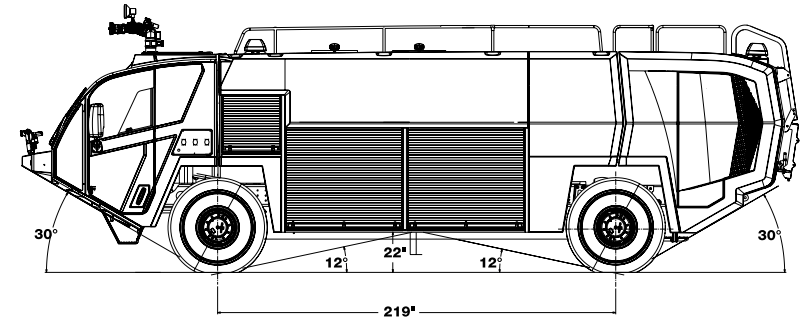

Striker

4x4

PERFORMANCE

Top Speed: Greater than 70 mph (113 km/h)

Side Slope Stability (Static): $\geq 30^\circ$

Gradeability: Ascend/descend a 50% grade

Turning Diameter: 84.5 ft. (25.75 m)

Dimensions:

- Length – 426 in. (1082 cm)
- U.S. Width – 120 in. (305 cm)
- European Width – 118 in. (300 cm)
- Height without HRET – Less than or equal to 140 in. (356 cm) (with full water tank)

CHASSIS

Engine: Deutz TCD 16.0 L V8, 697 hp, 1,950 ft./lbs. of torque at 1,400 rpm.

Emission Rating Available; US Tier 4/EU Stage IIIB/Euro 5 Compliant;

US Tier 3/EU Stage IIIA/Euro 3

Transmission: Allison 4800 EVS transmission; electronic/7-speed/automatic

Anti-Lock Braking System (ABS)

Cab: 5-person seating; aluminum frame construction with center steering position; wrap-around, cockpit style instrument panel; easy-read backlit gauges and controls

Transfer Case: Oshkosh® independent with torque proportioning differential and driver selected locking mechanism

Front Axle: 31,000 lbs. (14,061 kg); Oshkosh double reduction with bevel gear differential; driver operated differential lock (transverse and separate front to back)

Front Brakes: Drum brakes standard (Rockwell® Dual Actuator Air); optional disc brakes available (17" Rotor Bendix® SN7 sliding caliper)

Rear Axle: 31,000 lbs. (14,061 kg); Oshkosh double reduction with bevel gear differential; driver operated differential lock

Rear Brakes: S-cam type; air/drum brake standard, disc brake available

Suspension: Oshkosh TAK-4® independent system with dual control arms and single coil spring; up to 16 in. (40.6 cm) of wheel end travel with superior all-terrain mobility, ride quality and handling

Air Conditioning: 60,000 BTU cooling capacity

Heat: 80,000 BTU heating capacity

Tires: Michelin® 24R21 XZL

GVWR: 62,000 lbs. (28123 kg)

Wheelbase: 219 in. (556 cm)

FIREFIGHTING SYSTEM

Roof Turret: Non-aspirating and aspirating options available, electric joystick control; 375/750 gpm (1420/2839 lpm), options available up to 1,585 gpm (6000 lpm)

Bumper Turret: Non-aspirating and aspirating options available, electric joystick control; 300 gpm (1136 lpm), higher flow options available

Water Tank: 1,500 gal. (5678 l) capacity; corrosion and UV resistant polypropylene

Foam Tank: 210 gal. (795 l) capacity; corrosion and UV resistant polypropylene

Fire Pump: Power divider driven Waterous® CRQB; single stage centrifugal, cast iron body, brass impeller, stainless steel shaft, pump-and-roll capable; 2,000 gpm (7511 lpm)

• Optional Waterous CRUQB High Flow Pump – 2,650 gpm (10,031 lpm)

• Optional Brass/Bronze Pump

Fixed Hose Reels: 100 ft. (30 m) hose length bundled with water/foam or 150 ft. (46 m) hose with dry chemical

Foam Proportioning System Around the Pump

Advanced Firefighting Technology Ready

- Ultra High Pressure Water
- High Pressure Water
- Quad Agent (Water, Foam, Dry Chemical, Clean Agent)
- Compressed Air Foam System

OPTIONS*

Swing Out Hose Reels: 150 ft. (46 m) hose bundled with water/foam or 100 ft. (30 m) water/foam hose with dry chemical

Crosslays: Up to 2 crosslays with up to 300 ft (91 m) of 1.75 in. (44 mm) hose per crosslay with 2 preconnects (1 each side)

Disc Brakes (outboard mounted)

Central Tire Inflation

Winterization System: For temperatures extreme as $-40^\circ\text{F}/\text{C}$

Hydraulic Generator: 10kW or 15kW options

Auxiliary Lighting

High Reach Extendable Turret (HRET)

High Volume, Fixed Mount or Low Attack Bumper Turrets: 1,250 gpm (4732 lpm) capacity

Dry Chemical System: Single agent or dual agent handline and/or primary turret discharge capability

Central Lube System

Hydro-Chem™ Direct Injection: Dry chemical nozzle for primary turret and/or dual agent handline discharge

Clean Agent System: Single agent or dual agent handline, and/or HRET discharge capability

Electronic Foam Proportioning

oshkoshairport.com

+1 920 235 9151



* Partial options listing only; additional and special request options are also available.

The Striker 4x4 meets or exceeds all National Fire Protection Association (NFPA) 414, Federal Aviation Administration (FAA) and International Civil Aviation Organization (ICAO) requirements for all 1,500 gallon (5678 l) water capacity ARFF vehicles.